



# Thai House (Kanyah at Pakchong)

①


- ✓ 1) Footing under ground (size  $1.00 \times 1.00 \times 1.50 \text{ m} = 12 \text{ mm.}$ ) = 9 units ✓ 24,000 B
- ✓ 2) Footing under ground (size  $1.00 \times 1.00 \times 1.00 \text{ m} = 12 \text{ mm.}$ ) = 4 units ✓ 19,000 B
- ✓ 3) Ground Beam (size  $.20 \times .30 = 12 \text{ mm.}$ ) Total 61 m. = 73,000 B ✓



- ✓ 4) FFI Beam size (.20 x .35 m) Total 46 m. 115,000 ✓
- ✓ 5) Pole (size  $.20 \times .20 \times (3.00 \text{ m} + 1.50 \text{ m}) = 13 \text{ units} = 52,000$  ✓



✓ 6) FFI Beam

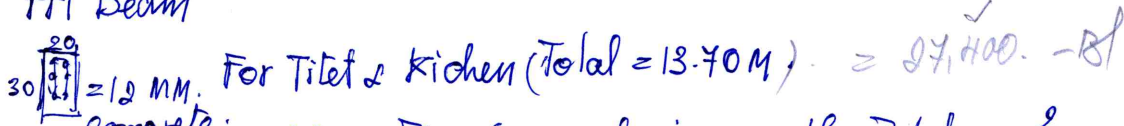

- ✓ 7) Cement Ground. Fr. (Finished & clearing smooth Total  $800 \text{ m}^2 = 64,000 \text{ B}$  ✓
- ✓ 8) FFI (Concrete for Toilet & Kitchen) =  $14 \text{ m}^2 = 21,000 \text{ B}$  ✓
- ✓ 9) Structure wall and wood finished (2 side) Total  $204 \text{ m}^2 = 714,000 \text{ B}$  ✓
- ✓ 10) ✓ Single <sup>window</sup> doors 9 units + FLAME = 31,500 B (TEAK WOOD) ✓  
 Double <sup>window</sup> door 8 units + FLAME = 44,000 B (TEAK WOOD) ✓  
 Special window 1 set + FLAME = 39,000 B (TEAK WOOD) ✓
- ✓ 11) Door slide. 1 set (between Bedrm and Rest Rm) = 40,000 B (TEAK) ✓

✓ 12) Door . 6 units + FLAME = 36,000 B HARD WOOD ✓

✓ 13) Tiling for Toilet. ( $26 \text{ m}^2$ ) = 29,100. B ✓

Tiling for kitchen & Toilet. ( $25 \text{ m}^2$ ) = 29,100. B ✓

✓ 14) Wood (Hard Wood) FFI. 77  $\text{m}^2$  + WOOD BEAM = 308,000. B ✓

✓ 15) Stairs. 1 set (wood) and Handrails = 28,500. B ✓

✓ 16) Handrails + Pole (wood) for <sup>Balcony</sup> stairs and = 24,000 B ✓

✓ 17) Roof structure (wood) and Tiling ( $149.5 \text{ m}^2$ ) = 448,500. B ✓

✓ 18) Bathroom Accessories and Toilet. (10,000 + 14,000 + 6,000 + 3,000) ✓

✓ 19) Lighting 25 units Main line (Inside) | 82,500. - B ✓  
 Small Power. 17 unite  
 Main Control Box.

- ✓ 20) Water ~~Pipe~~ P.V.C Pipe. (Inside) = 25,000 Bf
- ?? 21) Ceiling Inside and outside = 240,000 Bf
- ✓ 22) ~~Door~~ Window for Bathroom and Toilet - 2 unit = 3,000 Bf ✓
- ✓ 23) Varnish. Painting and Decorating. = 80,000 Bf
- ✓ 24) ~~Window~~ Security Bars = 20,000 Bf
- ✓ 25) Wood for closing ~~Tiling~~ Roof Tiling 60M = 27,000 Bf
- ✓ 26) Roof Drainage (84M) = 29,400 - Bf
- ✓ 27) Tank for Bathroom and kitchen = 25,000 Bf

Not include

(Septic Tank) ~~1.6 M<sup>3</sup>~~ 1.6 M<sup>3</sup> 1  
 and 2 Tank for septic water - 2 M<sup>3</sup>

- Road
- Water Tank + Pump
- Drainage around your land
- Electrical Power Connection outside
- Water pipe Connection outside

TOTAL = 2,707,200. - THB